


Product datasheet

Specifications

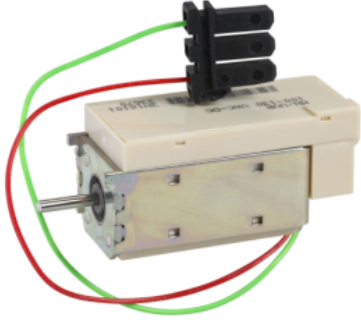

voltage release MN - 200..250 V DC/AC 50/60 Hz

33822

Main

Range	MasterPacT
Range of product	MasterPact NT MasterPact NT NAVY ComPacT NS630b...1600 new generation
Device short name	MN
Product or component type	Voltage release
Device application	Control
Voltage release type	Opening coil Undervoltage release
Control type	Standard
[Uc] control circuit voltage	200...250 V AC 50/60 Hz 200...250 V DC
Circuit breaker mounting mode	Drawout
Range compatibility	Masterpact (MasterPact NT) ComPact (ComPact NS630b...1600)

Complementary

Operating threshold	0.35...0.7 x Un opening 0.85 x Un closing
Response time	40 ms +/- 5 % for MasterPact NT 90 ms +/- 5 % for Compact NS630b...1600
Supply holding power	4.5 VA

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.5 cm
Package 1 Width	6.0 cm
Package 1 Length	8.2 cm
Package 1 Weight	177.0 g

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)

[EU RoHS Declaration](#)

Mercury free	Yes
---------------------	-----

China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
------------------------------	---

RoHS exemption information	Yes
-----------------------------------	-----

Contractual warranty

Warranty	18 months
-----------------	-----------

Recommended replacement(s)